Convertor pentru protocol OPC UA
FAS converter OPC UA unlimited



• interfață software inteligentă • hardware standard folosit în automatizarea clădirilor • protocol standard OPC UA furnizat de convetor • unul sau mai multe protocoale simultan pe acelaşi hardware • mai multe protocoale pot fi integrate • utilizarea unei rețele existente IP sau crearea unei retele proprii • suport de montare flexibil • dispozitiv cu montare în dulap de distribuție, pentru economie de spațiu

• Intelligent software interface • Standard hardware of building automation • Standard protocol OPC UA provided from converter • One or more protocols simultaneously over the same hardware • Further protocols can be integrated • Use of an existing IP network or creation of an own network • Flexible mounting bracket • Space-saving switch cabinet installation

Descriere

Interfață de conversie pentru conectarea centralelor de incendiu Integral EvoxX la un sistem de management supraordonat, de ex. sistemul BMS, prin LAN. Convertorul are patru interfețe LAN prin care centrala de incendiu este conectată şi până la trei protocoale diferite pot fi transmise simultan.

Conține toate licențele necesare pentru a oferi o interfață implicită OPC UA cu peste 10 000 de puncte de date.

Converterul FAS este echipat cu un ventialtor controlabil, cu rulment dublu, înlocuibil. Are leduri de stare pe față pentru a semnaliza starea de operare şi poate fi instalat cu uşurință in cabinete de control cu placă de montare ataşată pe peretele din spate.

Pentru proiectarea şi instalarea sistemelor automate de semnalizare la incendiu, trebuiesc respectate normele şi instrucțiunile specifice țării în care se execută proiectul.

Description

Interface converter for connecting an Integral EvoxX fire alarm control panel to a superordinate management system e.g. building technology via LAN. The converter has four LAN interfaces via which the fire alarm control panel is connected and up to three different protocols can be output simultaneously.

All licences required to provide the default interface OPC UA with more than 10 000 data points are included.

The FAS converter is equipped with a controllable, double ball-bearing fan, which is replaceable. It also has status LEDs on the front to indicate the operating states and can be easily installed in control cabinets with the mounting plate attached to the rear wall.


The country-specific regulations for the planning and installation of automatic fire alarm systems apply for planning the system.

SCHRACK SECONET

Schrack Seconet AG | 1120 Vienna | Eibesbrunnergasse 18 | +43 50 857
office@schrack-seconet.com | schrack-seconet.com

Convertor pentru protocol OPC UA
FAS converter OPC UA unlimited

Dimensiuni
Dimensions

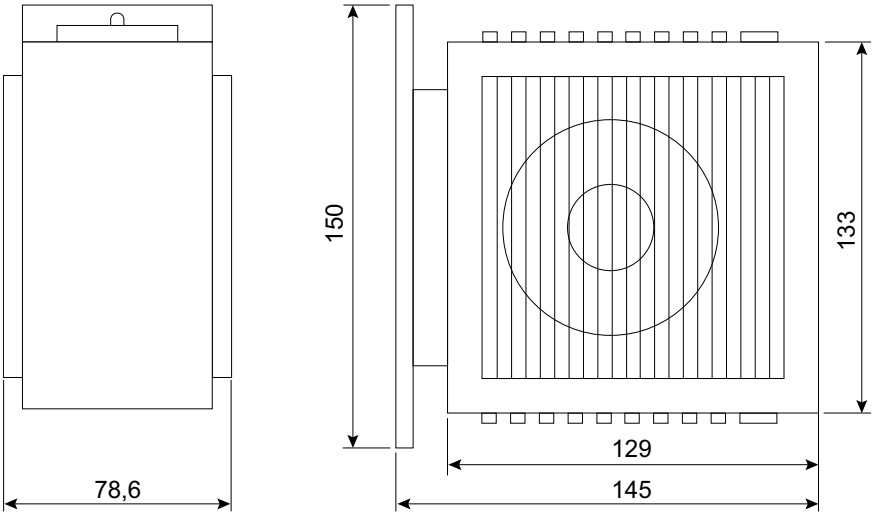

Toate dimensiunile în mm
All dimensions in mm

Date tehnice

Interval tensiune de funcționare	22 – 30 Vcc (24 Vcc sursă de alimentare)
Consum	max. 60 W cu echipamentul de bază
Interconectare cu	4 × RJ-45 Ethernet 100/1000BASE-T 2 x porturi de afişare 4 × USB 3.0
Puncte de date	peste 10 000
Clasa de protecție	IP20
Temperatură de funcționare	0 °C până la +55 °C
Umiditate relativă a aerului	95 % fără condensare
Material carcasă	Aluminiu zinc turnat
Dimensiuni	
cu placă de montare	150 × 145 × 78,6 mm (î × l × a)
fără placă de montare	133 × 129 × 78,6 mm (î × l × a)
Greutate	
cu placă de montare	1700 g
fără placă de montare	1460 g

Technical data

Operating voltage range	22 to 30 V DC (24 V DC power supply unit)
Current consumption	max. 60 W with basic equipment
Interfaces	4 × RJ-45 Ethernet 100/1000BASE-T 2 × display port 4 × USB 3.0
Data points	more than 10 000
Degree of protection	IP20
Ambient temperature	0 °C to +55 °C
Relative humidity	95 % non-condensing
Case material	Aluminium-zinc die-casting
Dimensions	
with mounting plate	150 × 145 × 78.6 mm (H×W×D)
without mounting plate	133 × 129 × 78.6 mm (H×W×D)
Weight	
with mounting plate	1700 g
without mounting plate	1460 g

© Schrack Seconet AG | B-DB-0260RO-EN | 2.2
Supus modificărilor de ordin tehnic
Mai multe informații pot fi obținute din documentația tehnică de specialitate

Subject to technical changes
Further information can be obtained from the technical documentation