Steckmodul SM
SM connection module



• Spannungsversorgte Diagnosebuchse • Blaue Intellifix-Buchse • Frontseitige Multimediabuchse • Eingangsüberwachung

• Power supplied diagnostic socket • Blue Intellifix socket
• Frontal multimedia socket • Input monitoring

Beschreibung

Steckvorrichtung mit spannungsversorgter Diagnosebuchse, blauer Intellifix-Buchse und Multimediabuchse. Geeignet zum Einbau in eine Medienschiene oder zur Wandmontage.

- Diagnosebuchse zum wahlweisen Anschluss:
  - Diagnosegerät mit sicherer Trennung nach DIN EN 60601-1 (2 × MOPP)
  - Diagnoseadapter für Kontaktmatten, Schallwächter etc.
  - Funkempfänger (mit oder ohne Netzteil)
- Blaue Intellifix-Buchse zum wahlweisen Anschluss:
  - Patiententerminals
  - Birntasters BT-IP
  - Staff Terminals
- Frontseitige Multimediabuchse für Netzwerkverbindungen zu einem Multimediaterminal. Dieses muss eine sichere Trennung gemäß DIN EN 60601-1 (2 × MOPP) gewährleisten.
- Automatische Eingangsüberwachung der Diagnosebuchse und der Intellifix-Buchse mit selbstständiger Rufauslösung bei Abzug (Abzugsruf)

Description

Connection module with powered diagnostic socket, blue Intellifix socket and multimedia socket. Suitable for mounting in the bed head unit or for wall mounting.


- Diagnostic socket for the optional connection:
  - Diagnostic device with safe isolation in accordance with DIN EN 60601-1 (2 × MOPP)
  - Diagnostic adapter for contact mats, noise monitors etc.
  - Radio receiver (with or without power supply unit)
- Blue Intellifix socket for the optional connection:
  - Patient terminals
  - BT-IP pear pushbutton
  - Staff Terminals
- Front multimedia socket for network connections to a multimedia terminal. This must provide a safe isolation in accordance with DIN EN 60601-1 (2 × MOPP).
- Automatic input monitoring of the diagnostic socket and the Intellifix socket with automatic call release (disconnection call)


SCHRACK SECONET

Schrack Seconet AG | 1120 Wien | Eibesbrunnergasse 18 | +43 50 857
office@schrack-seconet.com | schrack-seconet.com

Steckmodul SM
SM connection module

Abmessungen
Dimensions

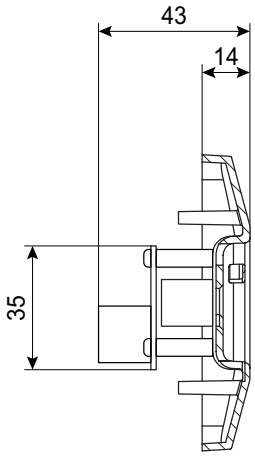

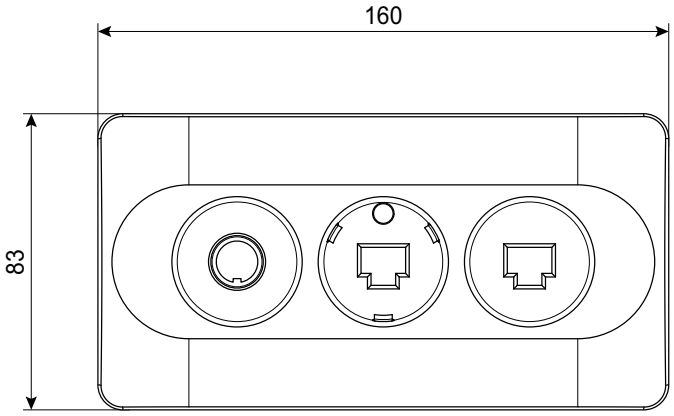

Alle Maße in mm
All dimensions in mm

Technische Daten

Systemkompatibilität	Visocall IP
Schnittstellen	
Systemanschluss	1 × RJ-45-Buchse zum Anschluss an einen IP-Port eines SWI9 (LAN-Schnittstelle mit PoE)
Diagnosebuchse	1 × fünfpolige DIN-Buchse mit Spannungsversorgung
Blaue Intellifix-Buchse	1 × RJ-45-Buchse mit Abwurfmechanik (LAN-Schnittstelle mit PoE)
Multimediabuchse	1 × RJ-45-Buchse (nur aktiv bei angeschlossenem Patientenbediengerät)
Montage	Aufputz, Unterputz oder Medienschiene
Schutzart	IP32, VDE 0834 Umweltklasse II
Umgebungstemperatur	+5 °C bis +40 °C
Relative Luftfeuchtigkeit	bis 95 % ohne Kondensation
Gehäusematerial	Kunststoff/ASA
Gehäusefarbe	weiß, RAL 9016
Abmessungen	83 × 160 × 43 mm (H×B×T)
Gewicht	105 g

Technical data

System compatibility	Visocall IP
Interfaces	
System connection	1 × RJ-45 socket for connection to the IP port of a SWI9 (LAN interface with PoE)
Diagnostic socket	1 × 5-pin DIN socket with power supply
Blue Intellifix socket	1 × RJ-45 socket with release mechanism (LAN interface with PoE)
Multimedia socket	1 × RJ-45 socket (only active when patient handset is connected)
Mounting	surface-mounted, flush-mounted or bed head unit
Degree of protection	IP32, VDE 0834 Environmental class II
Ambient temperature	+5 °C to +40 °C
Relative air humidity	up to 95 % without condensation
Case material	plastic/ASA
Case colour	white, RAL 9016
Dimensions	83 × 160 × 43 mm (H×W×D)
Weight	105 g

© Schrack Seconet AG | K-DB-0049DE-EN | 3.3
Technische Änderungen vorbehalten
Weitere Informationen sind der Technischen Dokumentation zu entnehmen

Subject to technical changes
Further information can be obtained from the technical documentation