Steckmodul SM-MMC
Connection module SM-MMC



• spannungsversorgte Diagnosebuchse • blaue Intellifix-Buchse • rückseitige Multimediabuchse • Eingangsüberwachung

• power supplied diagnostic socket • blue Intellifix socket
• rear multimedia socket • input monitoring

Beschreibung

Steckvorrichtung mit spannungsversorgter Diagnosebuchse, blauer Intellifix-Buchse und Multimediabuchse. Geeignet zum Einbau in eine Medienschiene oder zur Wandmontage.

- Diagnosebuchse zum wahlweisen Anschluss:
  - Diagnosegerät mit sicherer Trennung nach DIN EN 60601-1 (2 × MOPP)
  - Diagnoseadapter für Kontaktmatten, Schallwächter etc.
  - Funkempfänger (mit oder ohne Netzteil)
- Blaue Intellifix-Buchse zum wahlweisen Anschluss:
  - Patiententerminals
  - Birntasters BT-IP
  - Staff Terminals
- Rückseitige Multimediabuchse für Netzwerkverbindungen zu einem Multimediaterminal. Dieses muss eine sichere Trennung gemäß DIN EN 60601-1 (2 × MOPP) gewährleisten.
- Automatische Eingangsüberwachung der Diagnosebuchse und der Intellifix-Buchse mit selbstständiger Rufauslösung bei Abzug (Abzugsruf)

Description

Connection module with powered diagnostic socket, blue Intellifix socket and multimedia socket. Suitable for installation in the bed head unit or for wall-mounting.


- Diagnostic socket for the optional connection:
  - Diagnostic device with safe isolation in accordance with DIN EN 60601-1 (2 × MOPP)
  - Diagnostic adapter for contact mats, noise monitors etc.
  - Radio receiver (with or without power supply unit)
- Blue Intellifix socket for the optional connection:
  - Patient terminals
  - Pear pushbutton BT-IP
  - Staff terminals
- Rear multimedia socket for network connections to a multimedia terminal. This must provide a safe isolation in accordance with DIN EN 60601-1 (2 × MOPP).
- Automatic input monitoring of the diagnostic socket and the Intellifix socket with automatic call releasing (disconnection call)


SCHRACK SECONET

Schrack Seconet AG | 1120 Wien | Eibesbrunnergasse 18 | +43 50 857
office@schrack-seconet.com | schrack-seconet.com

Steckmodul SM-MMC
Connection module SM-MMC

Abmessungen
Dimensions

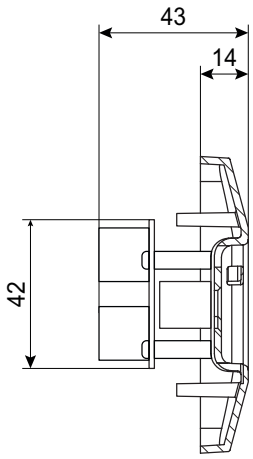

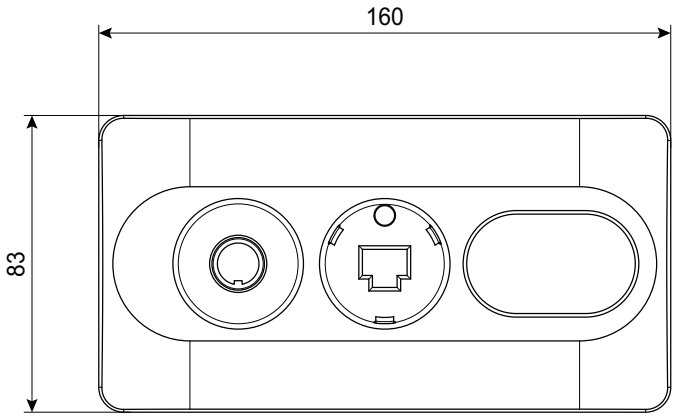

Alle Maße in mm
All dimensions in mm

Technische Daten

Systemkompatibilität:	Visocall IP
Schnittstellen:	
Systemanschluss:	1 × RJ-45-Buchse zum Anschluss an einen IP-Port eines SWI9 (LAN-Schnittstelle mit PoE)
Diagnosebuchse:	1 × 5-polige spannungsversorgte DIN-Buchse
Blaue Intellifix-Buchse:	1 × RJ-45-Buchse mit Abwurfmechanik (LAN-Schnittstelle mit PoE)
Multimediabuchse:	1 × RJ-45-Buchse (nur aktiv bei angeschlossenem Patientenbediengerät)
Montage:	Aufputz, Unterputz oder in Medienschiene
Schutzart:	IP 32, VDE 0834 Umweltklasse II
Umgebungstemperatur:	+5 °C bis +40 °C
Relative Luftfeuchtigkeit:	bis 95 % ohne Kondensation
Gehäuse:	Kunststoff ABS, weiß RAL 9016
Abmessungen:	83 × 160 × 43 mm (H×B×T)
Gewicht:	105 g

Technical data

System compatibility:	Visocall IP
Interfaces:	
System connection:	1 × RJ-45 socket for connection to the IP port of a SWI9 (LAN interface with PoE)
Diagnostic socket:	1 × 5-pin powered DIN socket
Blue Intellifix socket:	1 × RJ-45 socket with release mechanism (LAN interface with PoE)
Multimedia socket:	1 × RJ-45 socket (only active when patient handset is connected)
Installation:	surface-mounted, flush-mounted or in a bed head unit
Protection class:	IP 32, VDE 0834 Environmental class II
Ambient temperature:	+5 °C to +40 °C
Relative air humidity:	up to 95 % without condensation
Case:	Plastic ABS, white RAL 9016
Dimensions:	83 × 160 × 43 mm (H×W×D)
Weight:	105 g

© Schrack Productions | K-DB-0050DE-EN | 3.1
Technische Änderungen vorbehalten
Weitere Informationen sind der Technischen Dokumentation zu entnehmen

Subject to technical changes
Further information can be obtained from the technical documentation