

Gehäuse G-SWI9

G-SWI9 case



- verzinktes Stahlblech
- Deckel mit Schnellverschluss und Lüftungsschlitzen
- zwei Kabelabfangschienen
- Schutzart IP 20

- galvanised sheet steel
- lid with quick acting closure and ventilation slits
- two cable catch rails
- protection class IP 20

Beschreibung

Verzinktes Stahlblechgehäuse für die Montage des Systemswitches SWI9. Der Deckel wird mittels Schnellverschluss am Gehäuse befestigt und enthält Lüftungsschlitze.

Die Montage des SWI9 im Gehäuse erfolgt mittels vier Stück M4×10 Schrauben aus Kunststoff, sowie Sicherungs- und Beilagscheiben auf hierfür vorgesehene M4 Einpressmuttern.

Zwei Kabelabfangschienen dienen zur Zugentlastung der eingeführten Kabel.

Description

Galvanised sheet steel case for mounting the system switch SWI9. The lid is attached to the enclosure by means of a quick acting closure and contains ventilation slits.

The SWI9 is mounted in the case using four M4×10 plastic screws, as well as lock washers and washers on the M4 press-in nuts provided for this purpose.

Two cable clamp rails are used for strain relieve of the inserted cables.


Gehäuse G-SWI9

G-SWI9 case

Abmessungen

Dimensions

Alle Maße in mm
All dimensions in mm

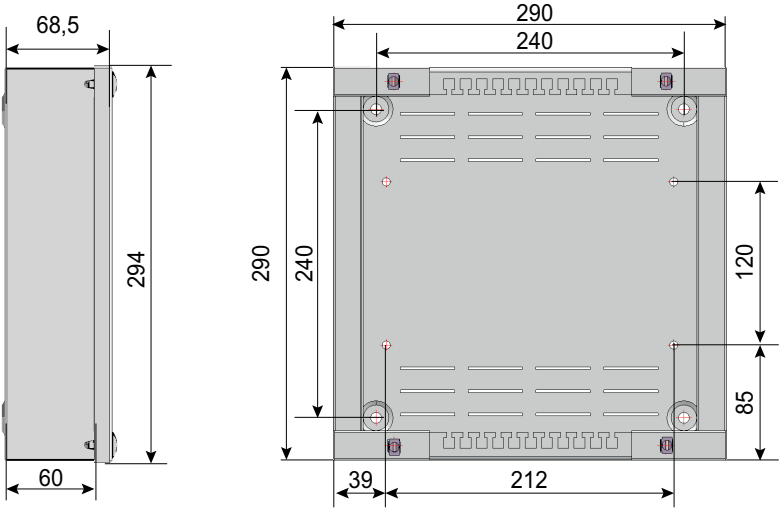

Technische Daten

Material:	verzinktes Stahlblech
Schutzart:	IP 20
Abmessungen:	294 × 294 × 68,5 mm (H×B×T)
Gewicht:	2,33 kg

Technical data

Material:	galvanised sheet steel
Protection class:	IP 20
Dimensions:	294 × 294 × 68.5 mm (H×W×D)
Weight:	2.33 kg